ENKVM-USBB

2-Port USB KVM switch with Easy Switch and Cable

User Guide

Package Contents

- 1 ENKVM-USBB 2-Port USB KVM Switch with Easy Switch and Cable
- 1 User Guide

Requirements

Console

- A VGA, SVGA, XGA, SXGA, or Multisync monitor capable of the highest resolution that you will be using on any computer during the installation
- A USB Keyboard
- A USB Mouse

Computers

The following equipment must be installed on each computer that is to be connected to the KVM switch:

- A VGA, SVGA, XGA, SXGA, or Multisync video port
- 2 USB Type A port

Hardware Review

1. Port LEDs
2. KVM Cables
3. Console Ports
4. USB keyboard/Mouse connector
5. Video Connector
6. Easy Switch
7. USB Keyboard and Mouse Connectors
8. Video Connector

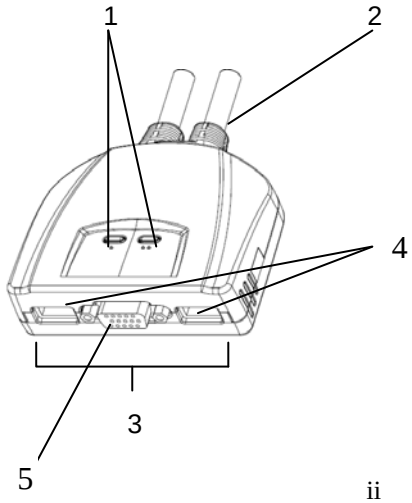

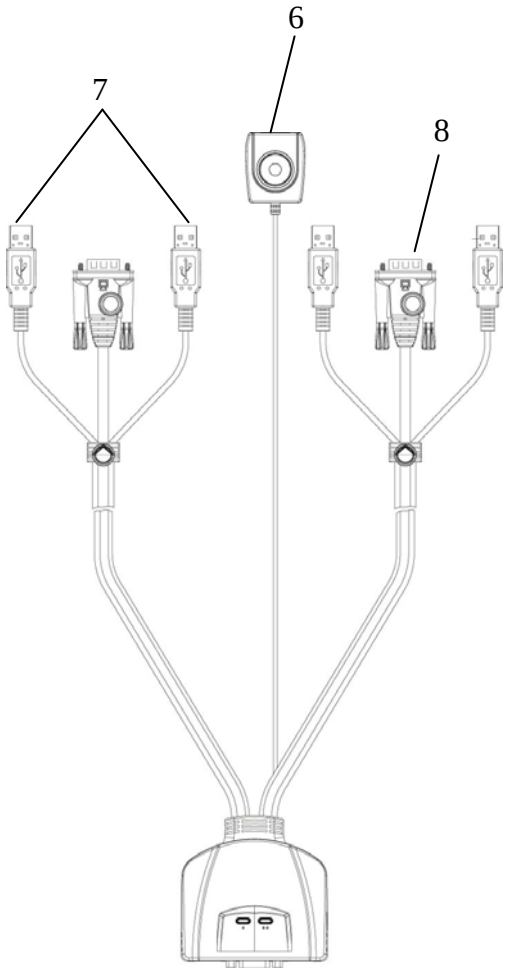

Installation

Important

1. Before you begin, make sure that the power to all the devices you will be connecting has been turned off. You must unplug the power cords of any computers that can be powered on from the keyboard. Otherwise, the KVM switch will receive power from the computer.
2. To prevent damage to your equipment, make sure that all the devices you will be connecting are properly grounded.

Installing your new ENKVM-USBB involves the following steps:

1. Plug your keyboard, monitor, and mouse into their ports on the ENKVM-USBB. The keyboard and mouse ports are labeled with an icon to distinguish them.
2. Plug the USB and video connectors of the attached KVM cables into their respective ports on the computers you are installing.
3. Position the Easy Switch within reach on your desktop.
4. Power on the power to the computers.

   Note: The ENKVM-USBB's Power On by default will link to the first computer you turn on.

Specifications

Function			**ENKVM-USBB**
Computer Connections			2
Port Selection			Easy Switch
Connectors	Console Ports	Keyboard or USB Hub	1 x USB Type A Female (Black)
		Mouse or USB Hub	1 x USB Type A Female (Black)
		Video	1 x HDB-15 Female (Blue)
	KVM Ports	Keyboard/ Mouse	4 x USB Type A Male (Black)
		Video	2 x HDB-15 Male (Blue)
LEDs	Selected		2 (Green)
Cable Length	Computers		1.2 m
	Easy Switch		1.8 m
Video			2048 x 1536; DDC2B
Environment	Operating Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Plastic
	Weight		0.31 kg
	Dimensions (L x W x H)		8.24 x 7.71 x 2.46 cm

Application Diagram

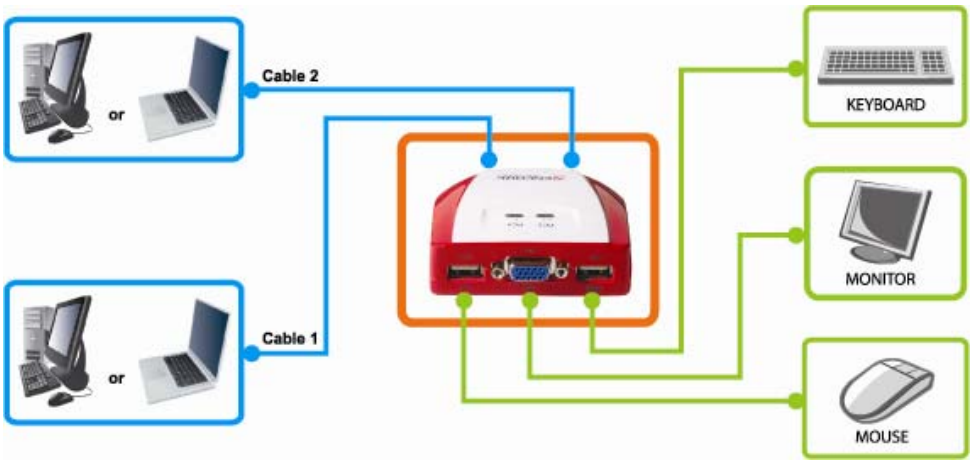

* Specifications are subject to change without notice.

Technical Support
For Technical Support or Installation Hotline contacts please visit our web site at http://www.encore-usa.com

ENKVM-USBB

USB de 2-puertos con cable KVM con 1.8m interruptor de selección a distancia

Manual del usuario

Contenido del Paquete

- 1 USB de 2-puertos con cable KVM 1.8 interruptor de selección a distancia.
- Guía de Usuario

Requisitos

Consola

- Un VGA, SVGA, XGA, SXGA, o Multisync monitor capaz de la más alta resolución que será el uso de cualquier equipo durante la instalación.
- Un teclado USB
- Un ratón USB

Ordenadores

En cada ordenador que vaya a conectar al sistema se tienen que instalar los siguientes Componentes:

- A VGA, SVGA, XGA, SXGA, o puerto de Multisync
- Tipo puerto A USB 2

Presentación del hardware

1. Revision del hardware
2. Puerto LED'S
3. Cables KVM
4. Puerto's de consola
5. Conector USB del ratón del teclado
6. Interruptor fácil
7. Interruptor de selección a distancia
8. Teclado USB y ratón
9. Conector de video

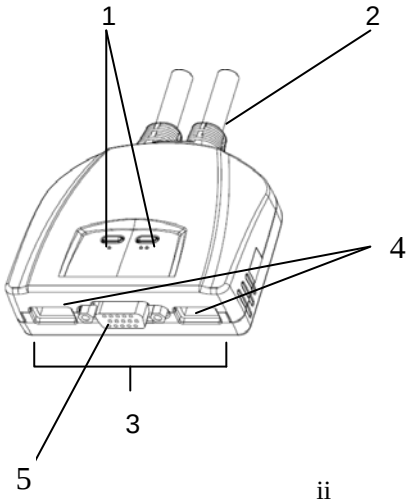

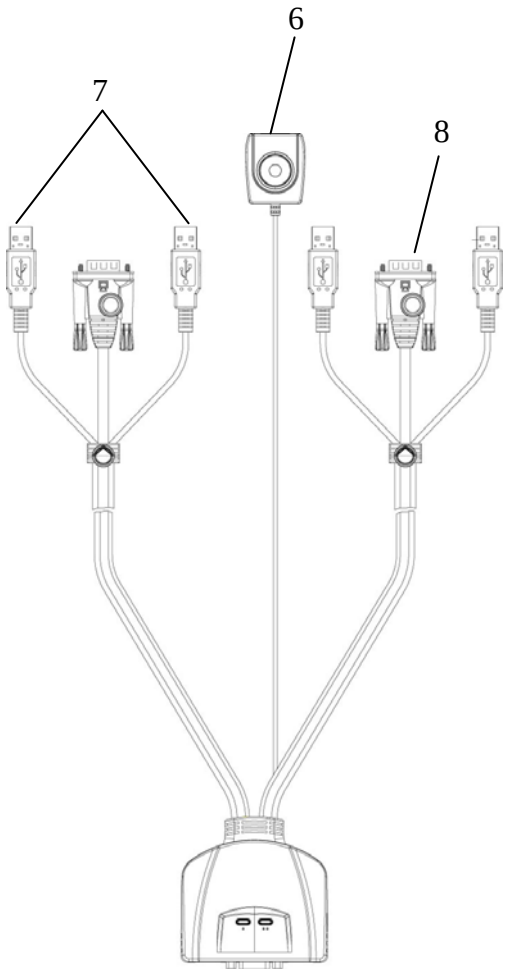

Instalación

Importante

1. Antes de empezar, apague todos los dispositivos que vaya a conectar. Si alguno de los ordenadores utiliza la función de Encender a través del teclado, tendrá que desconectar su cable de alimentación. En caso contrario, el concentrador recibirá la electricidad a través del ordenador.
2. Para evitar daños en los dispositivos, verifi que estén conectados a tierra correctamente.

La instalación del ENKVM-USBB incluye los pasos siguientes:

1. Conecte el teclado, el ratón y el monitor a los puertos correspondientes del ENKVM-USBB. Los puertos para teclado y ratón vienen marcados para su identifi cación.
2. Conecte los conectores USB ca y tarjeta gráfi de los cables KVM incluidos a los puertos correspondientes de cada uno de los ordenadores que quiera instalar.
3. Posicione el interruptor a selección de distancia cerca de su computador.
4. Encienda los ordenadores.

   Nota: Por defecto, el ENKVM-USBB establece la conexión con el primero ordenador encendido.

Especificaciones

Funciones			**ENKVM-USBB**
Conectador de computadora			2
Seleccion de puerto			Interruptor facil
Conectores	Puertos de consola	Teclado	1x Tipo A Femenino (Negro)
		Raton	1x USB tipo A Femenino (Negro)
		Video	1x HDB- 15 Femenino (Azul)
	Puertos KVM	Teclado / Raton	4x USB Tipo A Masculino (Negro)
		Video	2 x HDB 15 Masculino (azul)
LED's	Seleccion		2 (Verde)
Longitud de Cable	Computadoras		1.2 m
	Easy Switch		1.8 m
Video			2048 x 1536; DDC2B
Entorno	Temperatura de funcionamiento		0-50°C
	Temperatura Almacenamiento		-20-60°C
	Humedad		0-80% RH, Sin condensacion
Propediades Fisicas	Vivienda		Plastico
	Peso		0.31 kg
	Dimensiones (L x W x H)		8.24 x 7.71 x 2.46 cm

Diagrama de aplicaciones

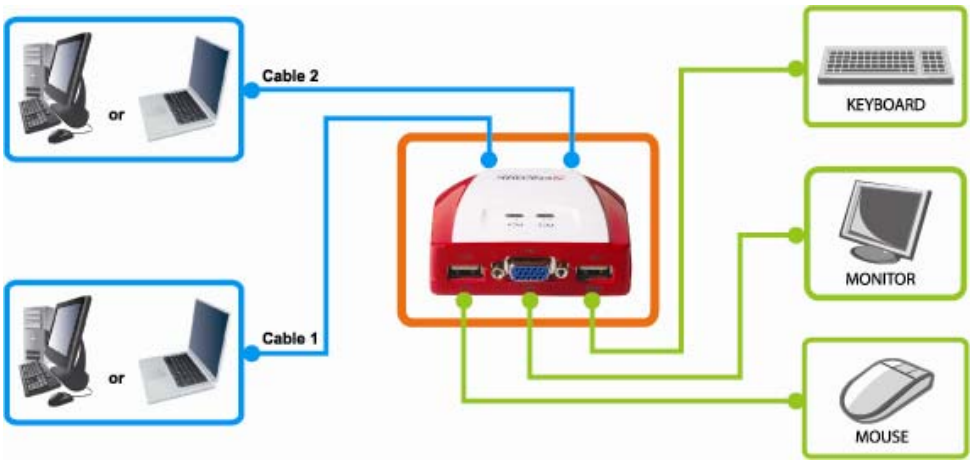

* Especificaciones están sujetas a cambios sin previo aviso

Soporte Tecnico
Para apoyo técnica de instalación de línea telefónica o los contactos por favor visite nuestro sitio de web www.encore-usa.com